

Industrial 8-Port 10/100/1000T + 2-Port 100/1000X SFP Ethernet Switch (-40~75 degrees C)



Industrial-grade, Reliable and Flexible Network Deployment

PLANET IGS-1020TF is an industrial 10-port full Gigabit Ethernet Switch providing non-blocking wire-speed performance and great flexibility for Gigabit Ethernet deployment and extension in harsh environment. It provides 8-port 10/100/1000BASE-T RJ45 copper and 2 extra 100/1000BASE-X SFP fiber optic interfaces delivered in an IP30 rugged strong case with redundant power system. The IGS-1020TF is well suited for applications in deploying surveillance system, secure control and wireless service in climatically demanding environments with wide temperature range from -40 to 75 degrees C.



Fiber-Optic Link Capability Enables Extension of Network Deployment


The two mini-GBIC slots built in the IGS-1020TF support SFP auto-detection and dual speed as it features 100BASE-FX and 1000BASE-SX/LX SFP (Small Form-factor Pluggable) fiber-optic modules, meaning the administrator now can flexibly choose the suitable SFP transceiver according to the transmission distance or the transmission speed required to extend the network efficiently. The distance can be extended from 550 meters to 2 kilometers (multi-mode fiber) and 10/20/30/40/50/60/70/120 kilometers (single-mode fiber or WDM fiber). They are well suited for applications to uplink to backbone switch and monitoring center in long distance.

Physical Port

- 8-port 10/100/1000BASE-T RJ45 with auto MDI/MDI-X function
- 2 SFP slots, supporting 1000BASE-X and 100BASE-FX transceiver type auto-detection

Industrial Case and Installation

- IP30 metal case protection
- DIN rail and wall mount design
- Redundant Power Design
 - 12 to 48V DC, redundant power with polarity reverse protect function
 - AC 24V power adapter acceptable
- Supports 6000V DC Ethernet ESD protection
- -40 to 75 degrees C operating temperature
- Supports Energy-Efficient Ethernet (EEE) function (IEEE 802.3az)

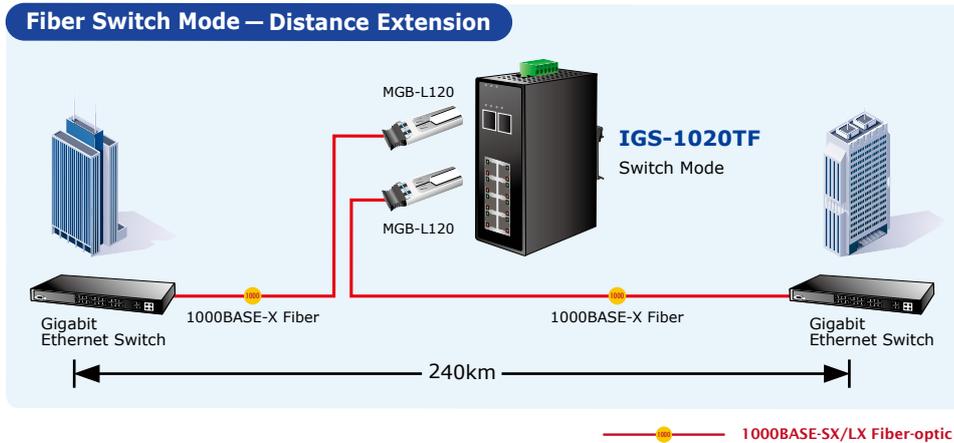


Environmentally Hardened Design

With IP30 rugged metal case protection, the IGS-1020TF provides a high level of immunity against electromagnetic interference and heavy electrical surges which are usually found on plant floors or in curbside traffic control cabinets. Being able to operate under the temperature range from -40 to 75 degrees C, the IGS-1020TF can be placed in almost any difficult environment. The IGS-1020TF also allows either DIN rail or wall mounting for efficient use of cabinet space.

Dual Power Input for High Availability Network System

The IGS-1020TF features a strong dual power input system with wide-ranging voltages (12V~48V DC or 24V AC) incorporated into customer's automation network to enhance system reliability and uptime. In the example below, when power supply 1 fails to work, the hardware failover function will be activated automatically to keep powering the IGS-1020TF via power supply 2 alternatively without any loss of operation.

**Non-stop Ethernet Service
Dual Power Input with Auto Failover**

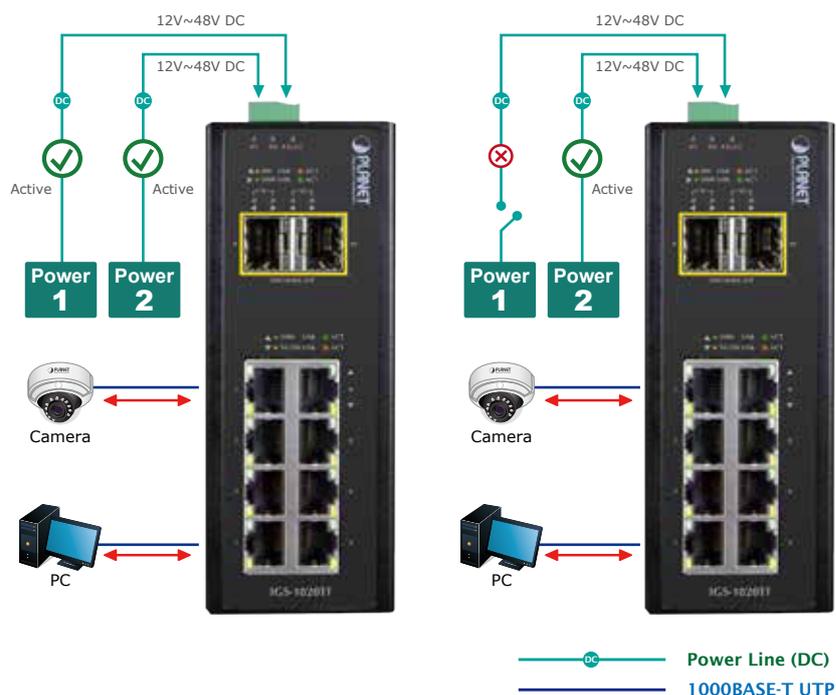

Energy Saving

The IGS-1020TF, incorporating advanced green networking technologies and IEEE 802.3az protocol based power saving, is able to provide power saving up to 50% less energy but maintains high performance efficiently.


- Link Down power saving

The Link Down power saving goes beyond IEEE specifications to automatically lower power consumption for a given port when it is not linked. With the Link Down power saving technology, the IGS-1020TF will automatically adjust power usage of the ports that are shut down or not connected to network device.

- Intelligent power scale based on cable length

Intelligent power scale is an intelligent algorithm that actively determines the appropriate power level based on cable length. When the IGS-1020TF is connected with Ethernet cable shorter than 20m, a device can obtain maximum power saving because the IGS-1020TF would automatically detect the Ethernet cable length and diminish power usage. The connected device can substantially reduce the overall power consumption, which makes a significant contribution to energy saving.

Intelligent Power Savings

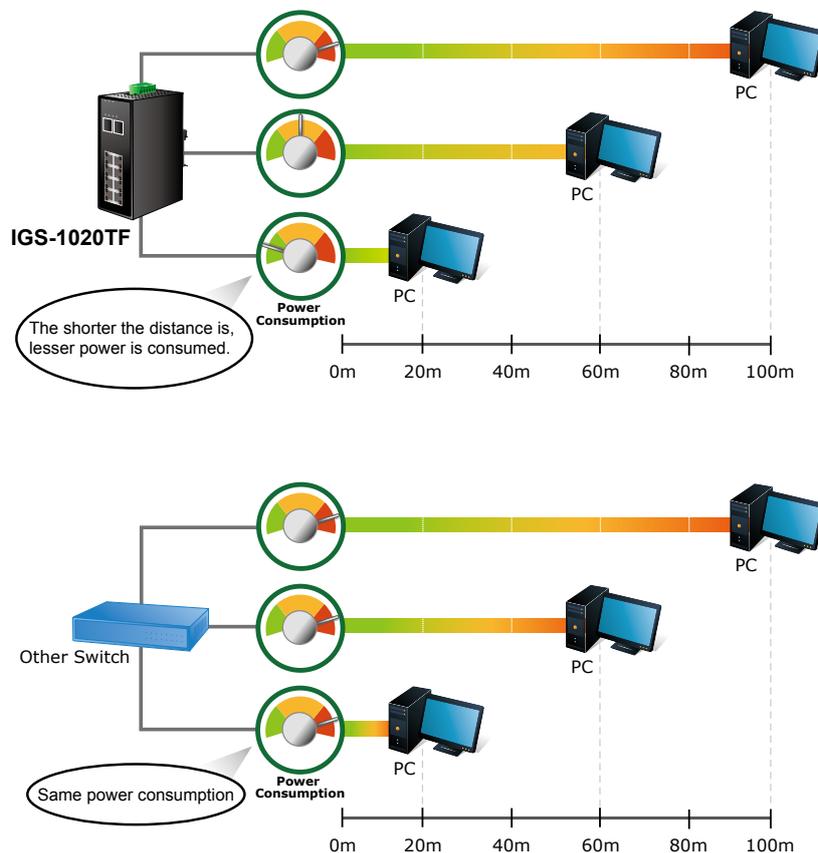

Robust Protection

The IGS-1020TF provides contact discharge of $\pm 6\text{KV}$ DC and air discharge of $\pm 8\text{KV}$ DC for Ethernet ESD protection. It also supports $\pm 4\text{KV}$ surge immunity to improve product stability and protects users' networks from devastating ESD attacks, making sure the flow of operation does not fluctuate.


Plug and Power Network Deployment

All of the RJ45 copper interfaces in the IGS-1020TF support 10/100/1000Mbps auto negotiation for optimal speed detection through RJ45 Category 6, 5 or 5e cables. The standard auto-MDI/MDI-X support can detect the type of connection to any Ethernet device without requiring special straight-through or crossover cables.

Applications


Ethernet Applications with Long-distance Fiber Uplink for Hardened Environment

The IGS-1020TF Industrial Gigabit Ethernet Switch offers full port Gigabit speed. It provides very high reliability and security features to make sure the continuous operation in harsh environments such as control cabinet of transportation, factory, outdoors and places where extreme low or high temperatures can be experienced. Moreover, the IGS-1020TF is also compatible with 100Mbps and 1000Mbps SFP transceivers to provide a strong, stable and long-distance connection and flexible industrial networking deployment.

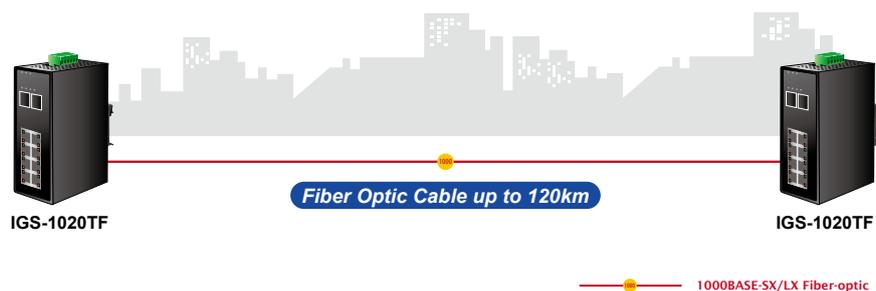


FTTx Solutions for MAN Application

To build a network solution of FTTH (Fiber to the Home) or FTTC (Fiber to the Curb) for ISPs, and FTTB (Fiber to the Building) for enterprises, the various distances of SFP and Bidi (WDM) transceivers are optional for customers. With two dual-speed SFP slots built in, the deployment distance of the IGS-1020TF can be extended up to 120 kilometers (single-mode fiber), which provides a high-performance edge service for FTTx solutions.

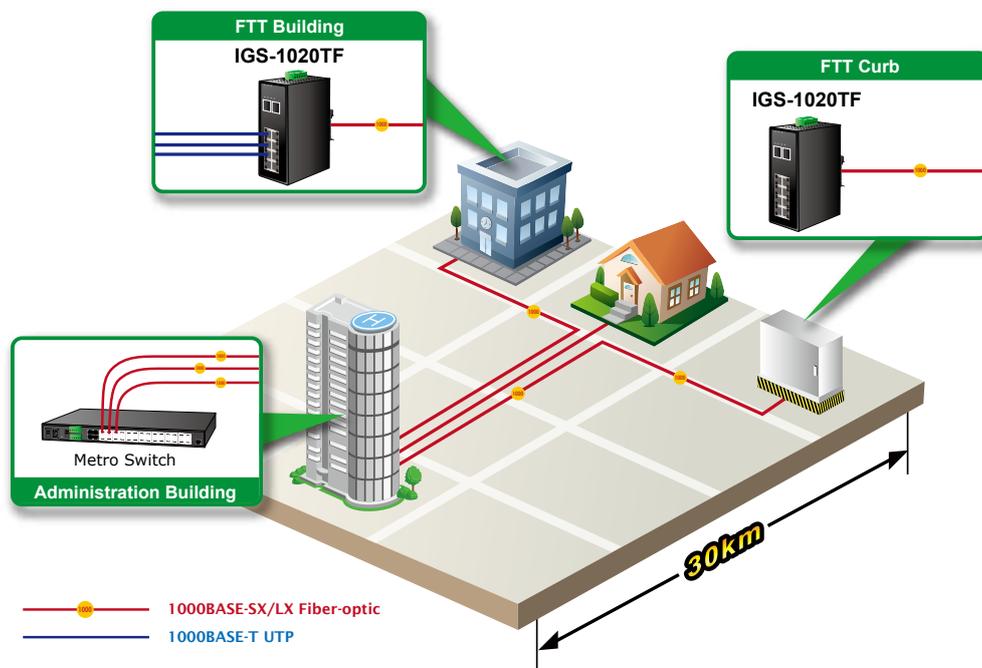

Specifications

Model	IGS-1020TF	
Hardware Specifications		
Copper Ports	8 x 10/100/1000BASE-T RJ45 TP Auto-MDI/MDI-X, auto-negotiation	
SFP/mini-GBIC Slots	2 1000BASE-SX/LX/BX SFP interfaces (Port-9 and Port-10) Compatible with 100BASE-FX SFP	
Switch Processing Scheme	Store-and-Forward	
Switch Fabric	20Gbps (non-blocking)	
Switch Throughput (packet per second)	14.88Mpps@64bytes	
MAC Address Table	4K entries	
Flow Control	Back pressure for half duplex IEEE 802.3x pause frame for full duplex	
Jumbo Frame	9216 bytes	
Connector	Removable 6-pin terminal block Pin 1/2 for Power 1; Pin 3/4 for fault alarm; Pin 5/6 for Power 2	
Alarm	Provides one relay output for power failure Alarm Relay current carry ability: 1A @ DC 24V	
LED Indicator	3 x LED for System and Power: Green: DC Power 1 Green: DC Power 2 Red: Power Fault 2 x LED for Per Copper Port (Port-1~Port-8): Green: 1000 LNK/ACT Orange:100 LNK/ACT 2 x LED for Per Mini-GBIC Interface (Port-9 and Port-10): Green: 1000 LNK/ACT Orange:100 LNK/ACT	
ESD Protection	6KV DC	
Enclosure	IP30 type metal case	
Installation	DIN rail kit and wall-mount ear	
Dimensions (W x D x H)	56 x 87 x 135 mm	
Weight	540g	
Power Requirements	DC 12~48V or AC 24V Redundant power with polarity reverses protection function	
Power Consumption/ Dissipation	8.7 watts/29.69BTU	
Cable	Twisted-pair	10BASE-T: 2-pair UTP Cat. 3, 4, 5, up to 100 meters 100BASE-TX: 2-pair UTP Cat. 5, 5e up to 100 meters 1000BASE-T: 4-pair UTP Cat. 5e, 6 up to 100 meters
	Fiber-Optic Cable	<ul style="list-style-type: none"> • 1000BASE-SX : 50/125µm or 62.5/125µm multi-mode fiber optic cable, up to 550m • 1000BASE-LX : 9/125µm single-mode fiber optic cable, up to 10/20/30/40/50/70/120 kilometers (vary on SFP module) • 100BASE-FX : 50/125µm or 62.5/125µm multi-mode fiber optic cable, up to 2 kilometers 9/125µm single-mode fiber optic cable, up to 20/40/60 kilometers (vary on SFP module)
Standards Conformance		
Standards Compliance	IEEE 802.3 Ethernet/10BASE-T IEEE 802.3u Fast Ethernet/100BASE-TX IEEE 802.3ab Gigabit Ethernet/1000BASE-T IEEE 802.3z Gigabit Ethernet/1000BASE-SX/LX IEEE 802.3x Full-Duplex Flow Control IEEE 802.3az Energy Efficient Ethernet (EEE) IEEE 802.1p Cos	
Regulatory Compliance	FCC Part 15 Class A, CE	
Stability Testing	IEC 60068-2-32 (free fall) IEC 60068-2-27 (anti-shock) IEC 60068-2-6 (anti-vibration)	
Environment		
Temperature	Operating: -40~75 degrees C Storage: -40~75 degrees C	
Humidity	Operating: 5~95% (non-condensing) Storage: 5~95% (non-condensing)	

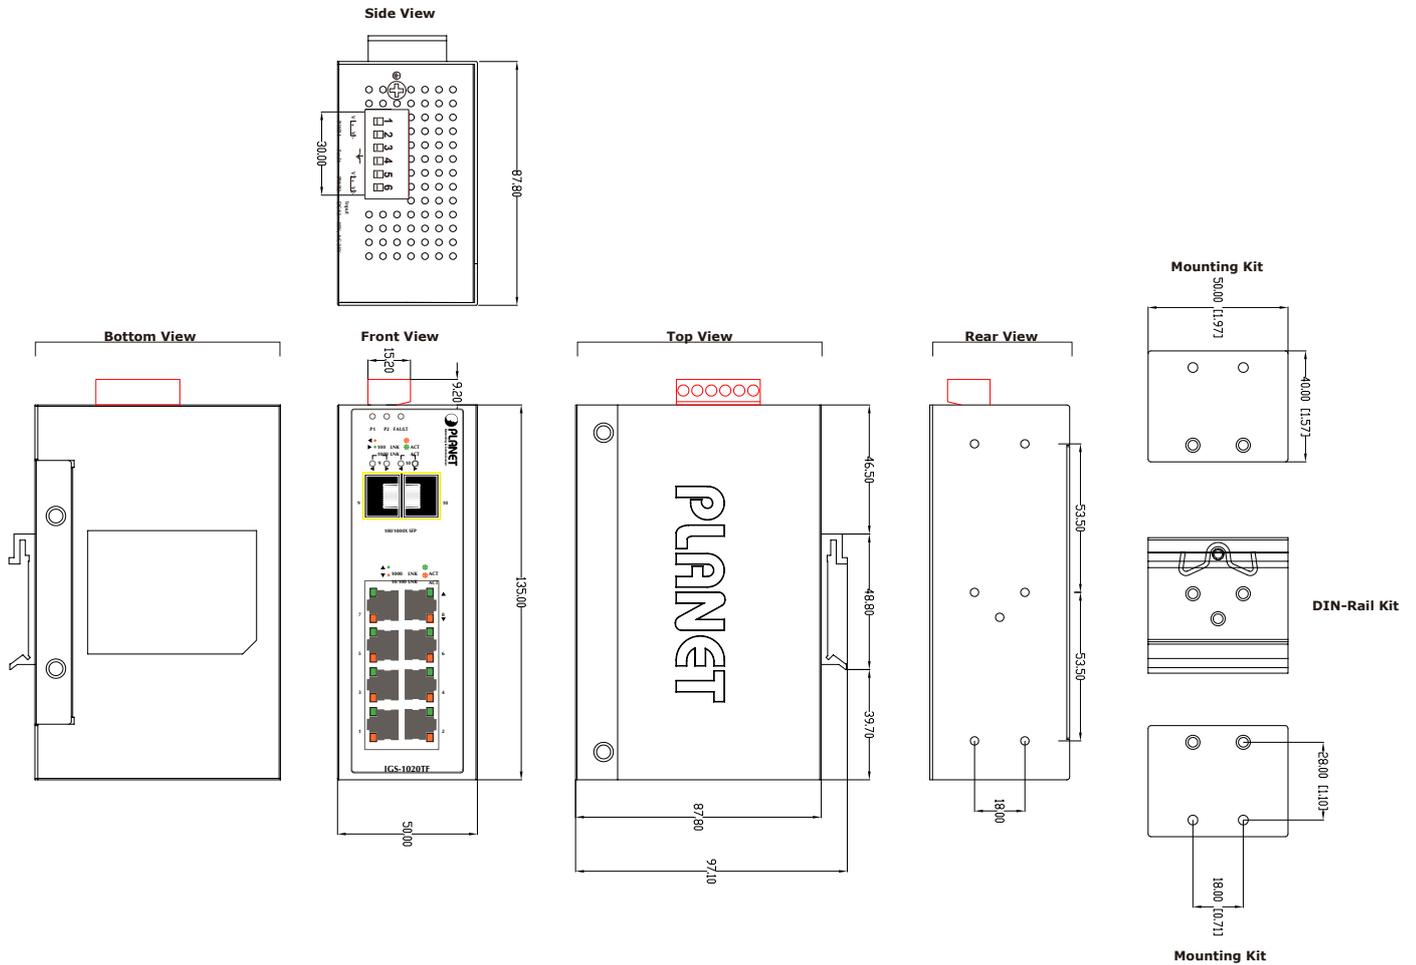

Dimensions (unit = mm)

Ordering Information

IGS-1020TF Art. No. 151749 Industrial 8-Port 10/100/1000T + 2-Port 100/1000X SFP Ethernet Switch (-40~75 degrees C)