

**Industrial Gigabit PoE Ethernet to fiber media converter with 1x10/100/1000Base-T(X) P.S.E. and 1x100/1000Base-X, SFP socket**

### Features

- Support 1 port 10/100/1000Base-T(X) P.S.E. auto-negotiation and auto-MDI/MDI-X copper port
- Support 1 port 100/1000Base-X SFP fiber port
- **P.S.E. fully compliant with IEEE802.3at** standard, provide up to 30 Watts
- Support Jumbo Frame up to 9K Bytes
- Support **LFP (Link Fault Pass-through)** function
- Relay output to carry capacity of 1A at 24 VDC for warning system
- Provided DIP-Switch to setting function
- Rigid IP-30 housing design
- DIN-Rail and wall mounting enabled




\* All specifications are subject to change without notice.

## Introduction

The IGPMC-111GP is a cost-effective solution for the conversion interface between 10/100/1000Base-T(X) and 100/1000Base-X SFP socket; it allows you to extend communication distance by optical fiber. IGPMC-111GP supports MDI/MDIX auto detection, so you don't need to use crossover wires. IGPMC-111GP also support Power over Ethernet, a system to transmit electrical power up to **30 watts**, along with data, to remote devices over standard twisted-pair cable in an Ethernet network. Each IGPMC-111GP has 1x10/100/1000Base-T(X) P.S.E. (Power Sourcing Equipment) port to provide power in a PoE setup.

The IGPMC-111GP also supports the **LFP (Link Fault Pass-through)** feature. When one side of the link fails, the other side continues transmitting packets, and waiting for a response that never arrives from the disconnected side. Use the DIP-Switch to enable the LFP function, then IGPMC-111GP will force the link to shut down as soon as noticed that the other link has failed, giving the application software a chance to react to the situation.

The IGPMC-111GP with wide operating temperature range from  $-40 \sim 75^{\circ}\text{C}$  and accepts a wide voltage range from dual 50~57 VDC power inputs, so it is suitable for harsh operating environments. Therefore, the IGPMC-111GP is reliable media converter with PoE capability and can satisfy most demand of operating environment.

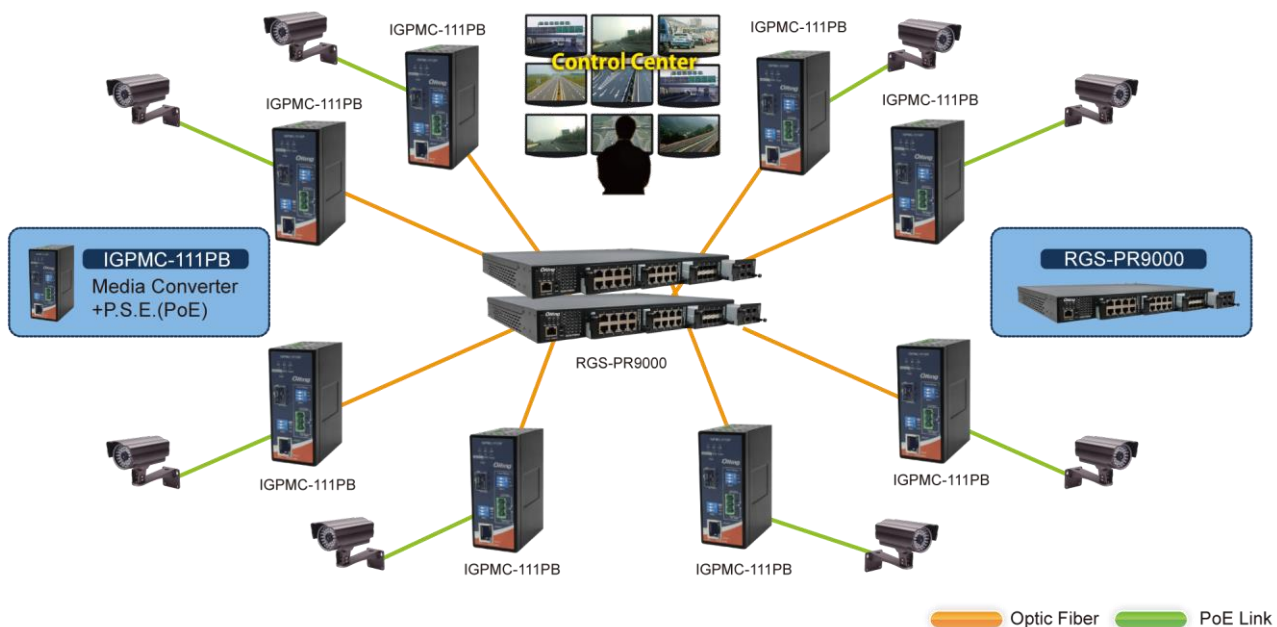

*Connections of Media converter*

\* All specifications are subject to change without notice.

## PoE Pin Definition

### 10/100Base-T(X) P.S.E. RJ-45 port

RJ-45 Pin Definition	
Pin No.	Description
#1	TD+ with PoE Power input +
#2	TD- with PoE Power input +
#3	RD+ with PoE Power input -
#4	Not used
#5	Not used
#6	RD- with PoE Power input -
#7	Not used
#8	Not used

### 1000Base-T P.S.E. RJ-45 port

RJ-45 Pin Definition	
Pin No.	Description
#1	BI_DA+ with PoE Power input +
#2	BI_DA- with PoE Power input +
#3	BI_DB+ with PoE Power input -
#4	BI_DC+
#5	BI_DC-
#6	BI_DB- with PoE Power input -
#7	BI_DD+
#8	BI_DD-

## DIP-Switch Setting

### 3-PIN

#### DIP-Switch 1

#### Description

DIP-Switch No.	Function	DIP-Switch Status	
1	Power-1 failure detection	ON	When power-1 failure, enable relay output
		OFF	Disable power-1 failure detection
2	Power-2 failure detection	ON	When power-2 failure, enable relay output
		OFF	Disable power-2 failure detection
3	LFP warning detection	ON	LFP signals when detected, enable relay output
		OFF	Disable LFP signals detection

### 3-PIN

#### DIP-Switch 2

#### Description

DIP-Swith No.	Function	DIP-Switch Status	
1	100/1000Base-FX mode selection	ON	100Base-FX mode
		OFF	1000Base-FX mode
2	LFP function	ON	Enable LFP function
		OFF	Disable LFP function
3	LFP control PoE output	ON	LFP signal when it is detected, the PoE output is stopped
		OFF	PoE continuous power supply

\* All specifications are subject to change without notice.

## Specifications

ORing PoE Media Converter Model	IGPMC-111GP
<b>Physical Ports</b>	
10/100/1000 Base-T(X) P.S.E. Port in RJ45 Auto MDI/MDIX	1
100/1000Base-X SFP port	1
<b>Technology</b>	
Ethernet Standards	IEEE 802.3i for 10Base-T IEEE 802.3u for 100Base-TX and 100Base-FX IEEE 802.3ab for 1000Base-T IEEE 802.3z for 1000Base-X IEEE 802.3at PoE specification (up to 30 Watts per port for P.S.E.)
Jumbo Frame	9K Bytes (1G mode only)
<b>LED Indicators</b>	
Power / Ready Indicator	Green: Power LED x 2
LFP statue indicator	Amber LED – (ON) LFP function fail / (OFF) LFP function disable
100/1000Base-X SFP Port Indicator	Green for port Link/Act
10/100/1000Base-T(X) Port Duplex Mode Indicator	Green LED – (ON) Full-duplex mode / (OFF) Half-Duplex mode
10/100/1000Base-T(X) RJ45 port Indicator	Green for Link/Act Dual color LED for speed – Green for 1000Mbps, Amber for 100Mbps, Off-light for 10Mbps
Fault Indicator (Fault)	Amber : Indicate unexpected event occurred
PoE indicator	Green: Power is supplied over Ethernet cable.
<b>Fault Contact</b>	
Relay	Relay output to carry capacity of 1A at 24 VDC
<b>Power</b>	
Input Power	Dual 50 ~ 57 VDC voltage power inputs in 4-pin terminal block
Power Consumption (Typ.)	4Watts
Overload Current Protection	Present
Reverse Polarity Protection	Present
<b>Physical Characteristic</b>	
Enclosure	IP-30
Dimension (W x D x H)	40 (W) x70 (D) x 95 (H) mm
Weight (g)	291g
<b>Environmental</b>	
Storage Temperature	-40 to 85°C (-40 to 185°F)
Operating Temperature	-40 to 75°C (40 to 167°F)
Operating Humidity	5% to 95% Non-condensing
<b>Regulatory approvals</b>	
EMI	FCC Part 15, CISPR (EN55022) class A
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11
Shock	IEC60068-2-27
Free Fall	IEC60068-2-32
Vibration	IEC60068-2-6
Safety	EN60950-1
<b>MTBF</b>	1,116,093hrs
<b>Warranty</b>	5 years

\* All specifications are subject to change without notice.

## Ordering Information

**IGPMC-1ABCC**

Code Definition	10/100/1000Base-T(X) Port Number	100/1000Base-X Fiber Port Number	Fiber Port Type
Option	- 1: 1 port	- 1: 1 port	- GP : 100/1000Base-X SFP

Model Name	Description	
Available Model	IGPMC-111GP	Industrial Gigabit Ethernet to fiber PoE media converter with 1x10/100/1000Base-T(X) P.S.E. and 1x100/1000Base-X, SFP socket

## Packing List

- IGPMC-111GP x 1
- Wall-mount Kit x 1
- Quick Installation Guide x 1
- DIN-Rail Kit x 1

## Optional Accessories

- SFP 100 series : 100Mbps SFP optical transceiver
- SFP 1G series : 1Gbps SFP optical transceiver

\* All specifications are subject to change without notice.